





BUILDING WITH YOU





BRAND NEW ATTACHMENTS

Built to take on the toughest jobs in nature.

YANMAR attachments give you the tools you need to accomplish major projects. They feature seamless attachment compatibility so you can have total confidence your attachment will not just fit, but perform for years to come.

Every attachment comes with a 24-month warranty to ensure you have a tool as reliable as your YANMAR. Read on and see what's right for your property, business, or residence and call your local YANMAR dealer to get started.





STANDARD BUCKETS



YANMAR buckets come in a variety of sizes, and attach quickly and easily to your machine.

- · Standard-width buckets.
- Replaceable bolt-on cutting edge.
- Tooth bar compatible.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	TOOTH BAR PART NO.	STRUCK CAPACITY*	WEIGHT
TL65RS / TL75VS	0405-434	67" Dirt Bucket	2045-670	13.2 ft ³	506 lbs
TL80VS	0405-435	72" Dirt Bucket	0402-610	14.9 ft ³	714 lbs
TL80VS	0405-436	74" Dirt Bucket	0404-461	15.3 ft³	732 lbs
TL100VS	0405-341	78" Dirt Bucket	N/A	16.1 ft ³	751 lbs
TL100VS**	0405-387	84" Dirt Bucket	N/A	17.5 ft³	793 lbs

^{*}approximate

TOOTH BUCKETS



All tooth buckets feature replaceable cast teeth with a cast shank welded directly to the bucket edge.

- Standard-width buckets.
- Welded shank.
- Replaceable cutting teeth.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	NUMBER OF TEETH	STRUCK CAPACITY*	WEIGHT
TL65RS / TL75VS	0405-437	67" Tooth Bucket	7	13.2 ft ³	458 lbs
TL80VS	0405-438	72" Tooth Bucket	8	14.9 ft ³	656 lbs
TL80VS	0405-439	74" Tooth Bucket	8	15.3 ft³	668 lbs
TL100VS	0405-342	78" Tooth Bucket	9	16.1 ft³	711 lbs
TL100VS**	0405-386	84" Tooth Bucket	10	17.4 ft ³	753 lbs

^{*}approximate



^{**} optional width based on application

^{**} optional width based on application

LIGHT MATERIAL BUCKETS



Featuring more capacity than a standard bucket, the light material bucket is ideal for snow, wood shavings, sawdust, pellets, mulch, feeds, fertilizers, bedding, and other applications.

- · Replaceable cutting edge.
- · Vertical bracing for increased rigidity.
- Windows for increased operator visibility (72"+ models).

COMPATIBLE MODELS	PART NO.	DESCRIPTION	STRUCK CAPACITY*	WEIGHT
TL65RS / TL75VS	0405-440	66" Light Material Bucket	20.4 ft ³	626 lbs
TL65RS/TL75VS/TL80VS	0405-441	72" Light Material Bucket	26.6 ft ³	929 lbs
TL80VS / TL100VS	0405-338	78" Light Material Bucket	28.8 ft ³	835 lbs
TL100VS	0405-339	84" Light Material Bucket	31.0 ft ³	948 lbs
TL100VS	0405-340	96" Light Material Bucket	35.5 ft³	959 lbs

^{*}approximate

LONG FLOOR BUCKETS



The heavy-duty low profile dirt bucket is easily visible from the cab and provides convenient material movement and grading performance.

- Grading bend for optimal grading in reverse and easy cleanout.
- Heavy duty bracing.
- Replaceable cutting edge.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	STRUCK CAPACITY*	WEIGHT
TL80VS / TL100VS	0405-469	Bucket, Long Floor, BOCE, 78"	15.4 ft³	865 lbs

4-IN-1 MULTIPURPOSE BUCKETS



With multiple functions in one attachment you can save precious time and money dozing, clamming, leveling, and bottom dumping.

- Guarded two-cylinder design.
- NitroSteel[™] cylinder rods and Teflon[™] coated bushings on all pivots.
- Replaceable bolt-on cutting edge.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	STRUCK CAPACITY* FT ³	WEIGHT
TL65RS / TL75VS	0405-442	67" Multipurpose Bucket	12.5 ft ³	1,006 lbs
TL80VS	0405-443	72" Multipurpose Bucket	13.3 ft ³	1,199 lbs

^{*}approximate

PALLET FORKS



Our heavy-duty pallet forks couple easily and make moving, maintaining, and organization easy.

- Adjustable tines.
- Heavy-duty frame.
- High-visibility brick guard.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	TINE LENGTH	CAPACITY	WEIGHT
TL65RS / TL75VS	0405-433	42" Pallet Fork Assembly	42"	4000.0 lbs	346 lbs
TL80VS / TL100VS	0405-343	48" Pallet Fork Assembly	48"	6200.0 lbs	455 lbs



GRAPPLE BUCKETS



This heavy-duty implement moves difficult-tohandle material like scrap, waste, and rocks with ease.

- Independent grapples grab uneven loads.
- Gusseted tines ensure strength and longevity.
- Two heavy-duty cylinders.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH	WEIGHT
TL65RS / TL75VS	0405-449	66" Grapple Bucket	68.0"	830 lbs
TL80VS	0405-344	72" Grapple Bucket	74.0"	860 lbs
TL100VS	0405-345	84" Grapple Bucket	84.0"	915 lbs

GRAPPLE RAKES



The grapple rake is designed with Grade 100 steel teeth, making it nearly three times stronger than regular steel.

- Greaseable hinge points ensure long life.
- Optimal spacing between teeth allows unwanted debris to fall through.
- Large, curved teeth provide optimal material grasping and raking.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH	WEIGHT
TL65RS / TL75VS / TL80VS	0405-448	72" Grapple Rake	73.3"	830 lbs
TL100VS	0405-500	84" Grapple Rake	85.3"	900 lbs

BREAKERS



Two sizes to help you break even the toughest conditions.

- Central lubrication.
- Field-replaceable bushings.
- Effective noise and vibration dampening components.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT	IMPACT RATE
TL65RS / TL75VS / TL80VS / TL100VS	0405-352	Breaker, ISO, Hydraulic, 310X	665.0 lbs	520-1,300 BPM

COLD PLANER



Cut asphalt and concrete with one attachment with easy maneuverability around manholes and other obstacles.

- Side shift and depth control adjustments for operation in a wide variety of environments.
- Solid drum design create fine, recyclable aggregate.
- Adjustable skid shoes help manage uneven terrain.
- High torque from planetary drum drive.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	CUTTING WIDTH	CUTTING Depth	WEIGHT	FLOW RATE	NUMBER OF TOOLS
TL80VS / TL100VS	0405-455	Cold Planer, 24", Multifunction	24"	0-6"	1,750 lbs	25-56 gpm	60



BROOMS



YANMAR angle brooms are robust and easy to use, for effective sweeping of dirt, snow and other unwanted material.

- High-gauge steel construction.
- Angle side to side.
- Quickly mounts on skid steer or compact track loader.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH	FLOW RANGE	WEIGHT	ANGLE DEGREES	WAFER DIA.	NUMBER OF SECTIONS
TL65RS / TL75VS / TL80VS	0405-451	Broom, Angle, 72", Hyd.	72"	13-24 gpm	850 lbs	30°	32"	38
TL80VS / TL100VS	0405-452	Broom, Angle, 84", Hyd.	84"	13-24 gpm	900 lbs	30°	32"	44

TELEBOOMS



Reach working heights and hold material securely without additional equipment beyond a compact track loader or skid steer.

- Use for general construction, truss installation and material handling.
- Extends beyond 21 feet.
- Durable, lightweight tubular steel.
- 72-inch hydraulic extension.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	LENGTH FULLY CONTRACTED	RATE LOAD (CONTRACTED)	LENGTH FULLY EXTENDED	RATE LOAD (EXTENDED)	WEIGHT
TL65RS / TL75VS / TL80VS / TL100VS	0405-454	Teleboom, Hydraulic	112"	750 lbs	256"	350 lbs	450 lbs

RECEIVER HITCH PLATES



The receiver hitch plate allows you to conveniently maneuver equipment, especially in tight spaces, without additional manpower.

- Standard 2" receiver.
- Safety steps.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	GROSS TRAILERING	MAX TONGUE WEIGHT	WEIGHT
TL65RS / TL75VS / TL80VS / 0405-347 Plate, Hitch Receiver, ISO Mour		Plate, Hitch Receiver, ISO Mount	12,000 lbs	2,000.0 lbs	107 lbs

GRADING BLADES



Use your machine for dozing, scraping, cutting swales, and leveling with the six-way hydraulically controlled YANMAR grading blade.

- Easy to operate.
- Heavy-duty construction.
- Adjustable depth shoes.
- Bolt-on, reversible three-piece cutting edge.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT	WIDTH	WIDTH Angled	SIDE ANGLE	TILT ANGLE
TL65RS / TL75VS / TL80VS / TL100VS	0405-379	Dozer, Grading/Leveling, 6-way, 78"	800.0 lbs	78"	67.5"	30.0°	11.5°
TL100VS	0405-380	Dozer, Grading/Leveling, 6-way, 96"	970.0 lbs	96"	83.0"	30.0°	11.5°



SOIL CONDITIONERS



YANMAR soil conditioners clear the way with a direct-drive motor and a tough set of tungstencarbide teeth.

- Power angling, +/- 25 degrees.
- Solid urethane wheels.
- Floating connection leveling.
- Removable box-end/wing plates.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH	WEIGHT	FLOW RATING
TL65RS / TL75VS / TL80VS	0405-348	Soil Conditioner, 72", Hyd. w/ float	79.5"	1,100 lbs	15-33 gpm
TL100VS	0405-349	Soil Conditioner, 84", Hyd. w/ float	91.5"	1,200 lbs	15-33 gpm

TRENCHERS



Heavy-duty trenchers are built for working in all conditions—and an attached crumber keeps your dig clean.

- Manual side-shift to trench close to objects.
- Direct drive motor.
- Replaceable spoil auger.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT	FLOW RATING	TRENCH WIDTH	TRENCH DEPTH (MAX)
TL65RS / TL75VS / TL80VS / TL100VS	0405-351	Trencher, ISO, 48" x 6", 50/50 Cup with Bullet (Standard Flow)	980.0 lbs	15-25 gpm	6"	48"

AUGER DRIVES



Your new ace in the hole. Load up YANMAR auger drive attachments to power your dig.

- Self-centering design.
- 2" Hex shaft.
- Planetary gear drive.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT	MAX. DIAMETER	FLOW RATING	MAX. CONTINUOUS
All	0405-350	Drive, Auger, 19PD, 2" Hex	354.0 lbs	36"	15-30 gpm	3,000 psi

AUGER BITS



From post holes to 3-foot craters, we offer seven bits that attach seamlessly to your auger drive for added versatility.

- 6", 9", 12", 18", 24", 30", 36"
- Heavy-duty design.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT	DIAMETER
All	0405-266	Bit, Auger, 6"	58.0 lbs	6"
All	0405-267	Bit, Auger, 9"	108.0 lbs	9"
All	0405-268	Bit, Auger, 12"	128.0 lbs	12"
All	0405-269	Bit, Auger, 18"	175.0 lbs	18"
All	0405-270	Bit, Auger, 24"	209.0 lbs	24"
All	0405-271	Bit, Auger, 30"	325.0 lbs	30"
All	0405-272	Bit, Auger, 36"	392.0 lbs	36"



STUMP GRINDERS



Chew through any size stump in tight areas that would be difficult to access with larger equipment.

- Offset cutting wheel for better visibility.
- Electric-over-hydraulic drive system.
- Durable carbide teeth.
- Bidirectional cutting for dual-pass operation.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	MAX CUTTING DIAMETER	MAX CUTTING DEPTH	FLOW RATE	WEIGHT	NUMBER OF Tools
TL65RS / TL75VS / TL80VS / TL100VS	0405-499	Stump Grinder, STD, HYD	32"	8" Below Ground	15-30 gpm	540 lbs	32

BRUSH MOWERS



Cut, clear, and mulch unwanted brush, thicket, grass and saplings. They're ideal for clearing trails, ditches, construction property sites and overgrown areas.

- Heavy duty gearbox and skid rails to glide across ground.
- Pressure relief system for equipment protection.
- Unique automatic float system.
- 6" roller contacts ground for smooth operation.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WIDTH	WEIGHT
TL65RS / TL75VS	0405-450	66" Brush Mower	71.0"	1,295 lbs
TL80VS / TL100VS	0405-346	73" Brush Mower	77.0"	1,360 lbs

SNOW BLOWERS



Clear snow quickly down to the ground with YANMAR snowblowers featuring a no-freeze-up chute design.

- Throw snow up to 40' on larger models.
- Direct drive hydraulic auger.
- Replaceable bolt-on cutting edge.
- No need for shear pins.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	CUTTING WIDTH	WEIGHT	FLOW RATING
TL65RS / TL75VS / TL80VS	0405-371	Snowblower, 73"	73.0"	870 lbs	11-25 gpm
TL100VS	0405-372	Snowblower, 79"	79.0"	890 lbs	25-45 gpm

SNOW PUSHERS



Move large volumes of snow very quickly from parking lots, driveways and more with the YANMAR snow pushers.

- Strong, high-carbon steel cutting edge for long life.
- 37" high side panels.
- Quick attach mounting for easy hook-up.
- Optional rubber cutting edge.
- Easy-adjust depth shoes.
- Includes pull back for clearing snow next to structures and other obstacles.

COMPATIBLE MODELS	PART NO.	DESCRIPTION	WEIGHT	WIDTH	WIDTH Angled	SIDE ANGLE
TL65RS / TL75VS / TL80VS / TL100VS	0405-375	Pusher, Snow, 96"	900.0 lbs	96"	N/A	N/A
TL80VS / TL100VS	0405-376	Pusher, Snow, 120"	980.0 lbs	120"	N/A	N/A


















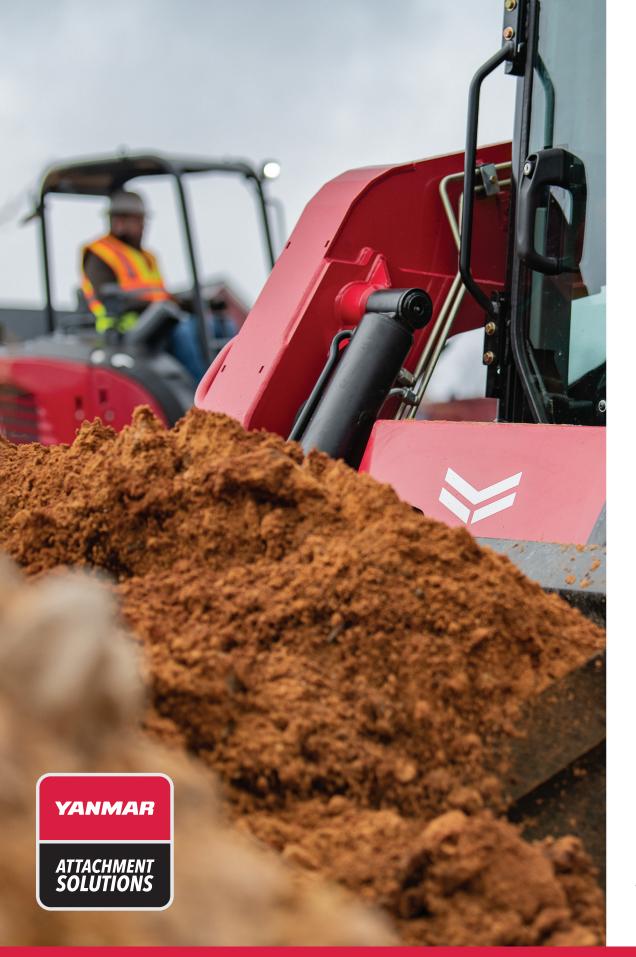



BUILDING WITH YOU