

**YANMAR**

V8

COMPACT WHEEL LOADER



Redefine every load.

Maximize your working hours with the smooth hydrostatic drive and high-lifting capabilities of the Yanmar V8. You'll find power at every turn thanks to the 62-horsepower Tier 4 Final diesel engine, ensuring powerful hydraulics are always on tap to make quick work of materials. The intuitive and easy-to-learn pilot controls allow operators to quickly become both proficient and safe, thanks to the multifunction joystick design. Plus, you'll find the same rugged dependability and ease of maintenance Yanmar is known for, ensuring you'll knock out more jobs with less downtime.

QUICK SPECS

Weight	Horsepower	Bucket Capacity
10,802 lbs	62 hp	1.05-1.57 yd ³

INNOVATIVE FEATURES



Spend more time moving

The full hydrostatic drive transmission ensures every movement is smooth and efficient. Featuring infinitely variable speed control in both forward and reverse and automatic speed optimization, you'll spend more time getting work done and less time fumbling with controls.



Standard auxiliary hydraulics

Power additional accessories with auxiliary hydraulic connections and set the perfect flow with standard adjustable proportional control.



Minimize downtime

Following in the Yanmar tradition, extended maintenance intervals and ease of serviceability is at the forefront of the V8's modern design.



Specifications

Model			V8	
Engine	Type		Diesel engine with intercooler, exhaust-gas optimised EPA Tier 4 Final / EU Stage 5	
	Model		Yanmar 4TNV98C	
	Output	hp (kw)/rpm	62 (46.2) / 2,200	
	Displacement	in³ (cm³)	201.4 (3,300)	
Performance	Standard Bucket Capacity	yd³ (m³)	1.05-1.57 (0.8-1.2)	
	Operating Load	lbs (kN)	5,512 (24.5)	
	Lifting Capacity at Low End	lbs (kN)	10,800 (48)	
	Tipping Load	Straight	lbs (kN)	8,311 (36.97)
		Articulated	lbs (kN)	7,341 (32.66)
	Breakout Force	lbs (kN)	10,328 (45.9)	
	Dumping Clearance	ft-in (mm)	8'4" (2,540)	
	Traveling Speed	Standard	mph (km/h)	12.4 (20)
		High Speed	mph (km/h)	22.4 (36)
	Oscillation Angle	degrees	±10°	
	Turning Radius - Inside Tires	ft-in (mm)	6'6" (1,981)	
	Min. Ground Clearance	ft-in (mm)	1'5" (435)	
	PTO	Front Hyd. PTO	PSI (kPa)	3,634 (17.24)
		GPM (L/min)	17 (65)	
Steering	Type		Articulated, 1 steering cylinder with final positioning damping on both sides, fully hydraulic through Load-Sensing priority valve	
	Articulated Angle	degrees	± 40°	
Transmission	Type		Hydrostatic	
Drives	Type		Automatic Drive	
Wheels	Type		405/70 R18 Goodyear Powerload	
Brakes	Type		Service brake hydraulically actuated center-mounted disc brake, acting in all 4 wheels via 4-wheel drive	
Operating Weight	Cabin	lbs (kg)	10,802 (4,900)	
Transport Dimensions	L x W x H	ft-in (mm)	16'6" x 6'1" x 8'9" (5,060 x 1,850 x 2,640)	

Please note that the standard equipment may vary from this list. Consult your YANMAR dealer for confirmation.

Dimensions - V8

- A** 16 ft. 7 in. (5,060 mm) **F** 8 ft. 4 in. (2,550 mm)
B 6 ft. 11 in. (2,100 mm) **G** 3 ft. 10 in. (1,189 mm)
C 6 ft. 1 in. (1,850 mm) **H** 10 ft. 6 in. (3,200 mm)
D 8 ft. 9 in. (2,640 mm) **I** 2 ft. 4 in. (700 mm)
E 5 ft. 10 in. (1,780 mm) **J** 13 ft. 8 in. (4,160 mm)

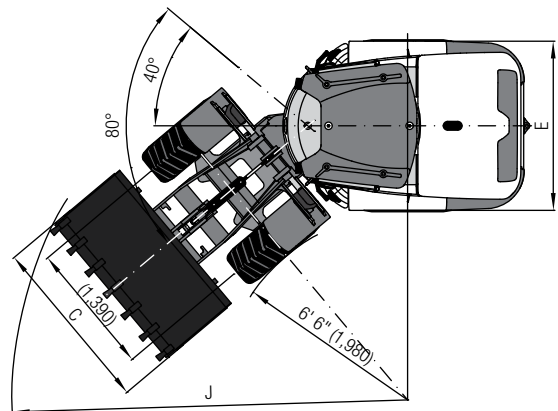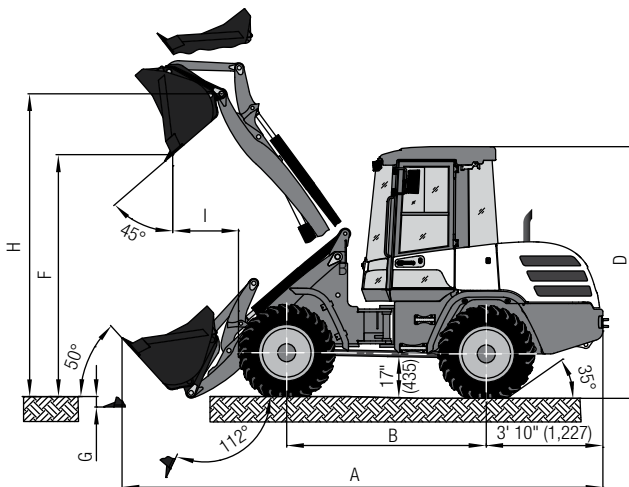

Find more information on the V8 at YanmarCE.com.