



YANMAR

TL25RP

COMPACT TRACK LOADER



**OPERATOR
COMFORT**

**LOW
GROUND IMPACT**

**STRONG,
CONSISTENT
PERFORMANCE**

COMPACT DESIGN BUILT TO DELIVER MORE IN TIGHT SPACES

The TL25RP combines strong productivity with a compact 48" footprint, making it ideal for tight jobsites. Built on ASV Posi-Track® technology, it delivers smooth ride quality, low ground pressure and dependable traction across a range of surfaces.

Designed for comfort and control, it helps operators work confidently in landscaping, rental and light construction applications. Its compact size also allows for easy access into confined or restricted working areas.

QUICK SPECS

OPERATING WEIGHT (OPEN ROPS)	GROSS POWER RATING	RATED OPERATING CAPACITY (35% OF TIPPING WEIGHT)
3,951 lbs (1,792 kg)	23.2 hp (17.1kW)	800 lbs (363 kg)

Preliminary Specifications

BUILDING WITH YOU

yanmarce.com



OPERATING SPECIFICATIONS

LOADER ARMS	RADIAL
OPERATING WEIGHT (OPEN ROPS)	3,951 lbs (1,792 kg)
OPERATING WEIGHT (ENCLOSED CAB)	4,073 lbs (1,848 kg)
GROUND PRESSURE AT OPERATING WEIGHT	3.3 psi (22.75 kPa)
RATED OPERATING CAPACITY (35% OF TIPPING WEIGHT)*	800 lbs (363 kg)
OPERATING CAPACITY (50% OF TIPPING WEIGHT)	1,143 lbs (513kg)
TIPPING WEIGHT	2,285 lbs (1,036 kg)
TRAVEL SPEED, MAXIMUM (mph)	6.9 mph (11.1 kmh)
BREAKOUT FORCE (DIRT BUCKET)	2,250 lbs (1,021 kg)

* Rated operating capacity (roc) is based off an allowable working capacity

ENGINE

TYPE	Diesel, 3-cylinder, turbocharged
MODEL	YANMAR 3TNV80FT
GROSS POWER RATING	23.2 hp (17.1 kW)
DISPLACEMENT	77 in ³ (1.3 L)
TORQUE, PEAK	63.2 ft-lb (85.7 Nm)
COOLING SYSTEM TYPE AND CAPACITY	Engine-driven fan and coolant/anti-freeze-filled radiator
INTAKE AIR CLEANER	Dual stage
EMISSION CONTROLS	Meets all U.S. EPA Tier 4 final standards
STANDARD FEATURES	Engine block heater

SERVICE CAPACITY

FUEL TANK	13 gal (49 L)
DEF CAPACITY	N/A

ELECTRICAL SYSTEM

NOMINAL CHARGE	12 V
BATTERY	590 CCA
CHARGING SYSTEM	55 amp alternator
OUTLETS	1-12 V port inside operator station
WIRING	Pre-wired for all factory-available accessories

AUXILIARY HYDRAULIC SYSTEM


AUXILIARY HYD. FLOW	STANDARD	9.9 gpm (37.5 lpm)
	HIGH	N/A
AUXILIARY HYD. PRESSURE	STANDARD	3,000 psi (20,684 kPa)
	HIGH	N/A
CONTROLS	Variable flow via joystick buttons, or continuous via console switch	
COUPLERS	Push to connect quick couplers mounted on manifold block. Pressure relief valve on block.	
COOLING SYSTEM	High efficiency oil cooler beside engine radiator, not stacked	
QUICK-ATTACH MOUNTING PLATE	ASV Mini-Track loader coupler with Manual Latching pins	

UNDERCARRIAGE

TRACK TYPE	General purpose track with embedded co-polymer cords and all-purpose treads
TRACK WIDTH	11 in (279 mm)
LENGTH OF TRACK ON GROUND	55 in (1,397 mm)
GROUND CONTACT AREA	1,210 in ² (0.78 m ²)
DRIVE SYSTEM	Two hydrostatic direct drive sprockets controlled by single joystick
UNDERCARRIAGE SUSPENSION	2 independent torsion axles per undercarriage
ROLLER WHEELS	12 ultra-high molecular weight polyethylene and rubber wheels per track. Wheels include sealed bearings

OPERATOR STATION

CAB	Open ROPS Base (B), Cold Weather Cab (P)
SEAT	Vinyl seat with built-in operator presence switch, lap bar and 2 in. (51 mm) wide seat belt
CONTROLS	LOADER CONTROL: Right-hand pilot hydraulic joystick controls loader lift, lower and tilt, plus intermittent control of auxiliary hydraulic. DRIVE CONTROL: Left-hand pilot hydraulic joystick controls machine speed and direction.
ENGINE SPEED CONTROL	Hand-operated rotary throttle
MACHINE DISPLAY	Multi-functional color 3.5 inch display/indicator: Engine RPM, engine coolant temperature, engine oil pressure, hydraulic oil temperature, battery voltage, hour meter, fuel level, trip meter, engine diagnostics, system monitoring, fault logging and more
ROPS	Meets ISO 3471
FOPS	Meets ISO 3449
OPERATOR RESTRAINT ANCHORAGE	Meets ISO 6683 CAL OSHA 1596
ILLUMINATION	2 fixed forward-facing LED lights; 1 adjustable rear-facing LED light; 1 interior light; 2 red LED tail lights
STANDARD FEATURES	Horn, backup alarm, rear window (P), cup holder (P), phone holder (P), roof panel (P)
OPTIONAL FEATURES	Rear view camera, turf track with smooth treads, bumper, brush guard, full rail metal seals, 1/4" polycarbonate front door, premium mechanical suspension seat

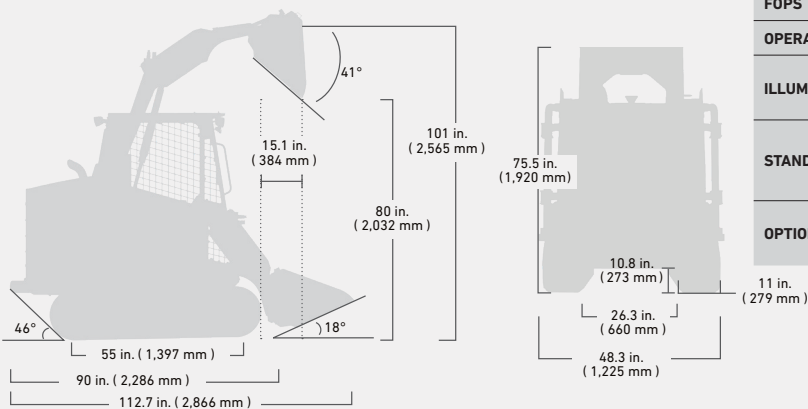

Preliminary Specifications