YANMAR

TL25RP

COMPACT TRACK LOADER

Equipment TODAY contractors' top 50 NEW PRODUCTS 2026 AWARD WINNER



OPERATOR COMFORT | **LOW GROUND IMPACT** | **STRONG, CONSISTENT PERFORMANCE**

COMPACT DESIGN BUILT TO DELIVER MORE IN TIGHT SPACES

The TL25RP combines strong productivity with a compact 48" footprint, making it ideal for tight jobsites. Built on ASV Posi-Track® technology, it delivers smooth ride quality, low ground pressure and dependable traction across a range of surfaces.

Designed for comfort and control, it helps operators work confidently in landscaping, rental and light construction applications. Its compact size also allows for easy access into confined or restricted working areas.

QUICK SPECS

OPERATING WEIGHT (OPEN ROPS)	GROSS POWER RATING	RATED OPERATING CAPACITY (35% OF TIPPING WEIGHT)
3,678 lbs (1,668 kg)	23.2 hp (17.1kW)	800 lbs (363 kg)

YANMAR

OPERATING SPECIFICATIONS

LOADER ARMS	RADIAL
OPERATING WEIGHT (OPEN ROPS)	3,678 lbs (1,668 kg)
OPERATING WEIGHT (ENCLOSED CAB)	3,800 lbs (1,724 kg)
GROUND PRESSURE AT OPERATING WEIGHT	3.0 psi (20.68 kPa)
RATED OPERATING CAPACITY (35% OF TIPPING WEIGHT)*	800 lbs (363 kg)
OPERATING CAPACITY (50% OF TIPPING WEIGHT)	1,143 lbs (518kg)
TIPPING WEIGHT	2,285 lbs (1,036 kg)
TRAVEL SPEED, MAXIMUM (mph)	6.9 mph (11.1 kmh)
BREAKOUT FORCE (DIRT BUCKET)	2,250 lbs (1,021 kg)

** Rated operating capacity (roc) is based off an allowable working capacity*

ENGINE


TYPE	Diesel, 3-cylinder, turbocharged
MODEL	YANMAR 3TNV80FT
GROSS POWER RATING	23.2 hp (17.1 kW)
DISPLACEMENT	77 in_3 (1.3 L)
TORQUE, PEAK	63.2 ft-lb (85.7 Nm)
COOLING SYSTEM TYPE AND CAPACITY	Engine-driven fan and coolant/anti-freeze-filled radiator
INTAKE AIR CLEANER	Dual stage
EMISSION CONTROLS	Meets all U.S. EPA Tier 4 final standards
STANDARD FEATURES	Engine block heater

SERVICE CAPACITY

FUEL TANK	13 gal (49 L)
DEF CAPACITY	N/A

ELECTRICAL SYSTEM

NOMINAL CHARGE	12 V
BATTERY	590 CCA
CHARGING SYSTEM	80 amp alternator
OUTLETS	1–12 V port inside operator station
WIRING	Pre-wired for all factory-available accessories

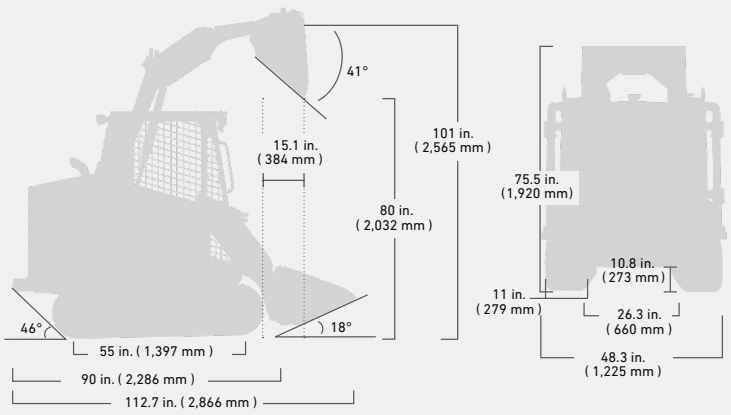

AUXILIARY HYDRAULIC SYSTEM

AUXILIARY HYD. FLOW	STANDARD	9.9 gpm (37.5 lpm)
	HIGH	N/A
AUXILIARY HYD. PRESSURE	STANDARD	3,000 psi (20,684 kPa)
	HIGH	N/A
CONTROLS		Variable flow via joystick buttons, or continuous via console switch
COUPLERS		Push to connect quick couplers mounted on manifold block. Pressure relief valve on block.
COOLING SYSTEM		High efficiency oil cooler beside engine radiator, not stacked
QUICK-ATTACH MOUNTING PLATE		ASV Mini-Track loader coupler with Manual Latching pins

UNDERCARRIAGE

TRACK TYPE	General purpose track with embedded co-polymer cords and all-purpose treads
TRACK WIDTH	11 in (279 mm)
LENGTH OF TRACK ON GROUND	55 in (1,397 mm)
GROUND CONTACT AREA	1,210 in^2 (0.78 m^2)
DRIVE SYSTEM	Two hydrostatic direct drive sprockets controlled by single joystick
UNDERCARRIAGE SUSPENSION	2 independent torsion axles per undercarriage
ROLLER WHEELS	12 ultra-high molecular weight polyethylene and rubber wheels per track. Wheels include sealed bearings

OPERATOR STATION

CAB	Open ROPS Base (B), Cold Weather Cab (P)
SEAT	Vinyl seat with built-in operator presence switch (B), adjustable contour vinyl seat (P) with built-in operator presence switch, lap bar and 2 in. (51 mm) wide seat belt
CONTROLS	LOADER CONTROL: Right-hand pilot hydraulic joystick controls loader lift, lower and tilt, plus intermittent control of auxiliary hydraulic. DRIVE CONTROL: Left-hand pilot hydraulic joystick controls machine speed and direction.
ENGINE SPEED CONTROL	Hand-operated rotary throttle
MACHINE DISPLAY	Multi-functional color 3.5 inch display/indicator: Engine RPM, engine coolant temperature, engine oil pressure, hydraulic oil temperature, battery voltage, hour meter, fuel level, trip meter, engine diagnostics, system monitoring, fault logging and more
ROPS	Meets ISO 3471
FOPS	Meets ISO 3449
OPERATOR RESTRAINT ANCHORAGE	Meets ISO 6683 CAL OSHA 1596
ILLUMINATION	2 fixed forward-facing LED lights; 1 adjustable rear-facing LED light; 1 interior light; 2 red LED tail lights
STANDARD FEATURES	Horn, backup alarm, cup holder (P), phone holder (P), roof panel (P), rear window (P)
OPTIONAL FEATURES	Rear view camera, turf track with smooth treads, bumper, brush guard, full rail metal seals, 1/4" polycarbonate front door

CERTAIN SPECIFICATIONS ARE BASED ON ENGINEERING CALCULATIONS AND ARE FOR COMPARISON PURPOSES ONLY. ACTUAL SPECIFICATIONS MAY VARY DUE TO DESIGN, MANUFACTURING, OPERATING CONDITIONS, AND OTHER FACTORS AND ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PHOTOGRAPHS AND DRAWINGS IN THIS DOCUMENT ARE FOR ILLUSTRATIVE AND DESCRIPTIVE PURPOSES ONLY. SOME ITEMS SHOWN MAY BE OPTIONAL AND SOME PRODUCTS SHOWN MAY NOT BE AVAILABLE AT ALL DEALERSHIPS. REFER TO THE APPROPRIATE OPERATOR'S MANUAL FOR INSTRUCTIONS ON THE PROPER USE OF THIS EQUIPMENT. YCENA DISCLAIMS ALL REPRESENTATIONS AND WARRANTIES, EXPRESS OR IMPLIED, OR ANY LIABILITY FROM THE USE OF THIS BROCHURE. THE ONLY WARRANTY APPLICABLE TO OUR EQUIPMENT IS THE STANDARD WRITTEN WARRANTY APPLICABLE TO THE PARTICULAR PRODUCT AND SALE AND YCENA MAKES NO OTHER WARRANTY, EXPRESS OR IMPLIED. ALL SALES ARE SUBJECT TO YCENA TERMS AND CONDITIONS OF SALES. PRODUCTS AND SERVICES LISTED MAY BE TRADEMARKS, SERVICE MARKS, OR TRADE NAMES OF YCENA AND/OR IT'S SUBSIDIARIES IN THE USA AND OTHER COUNTRIES. ALL RIGHTS RESERVED. YCENA IS AN ABBREVIATION FOR YANMAR COMPACT EQUIPMENT NORTH AMERICA, INC.

YAN_260904_TL25RP_v5